



SPECIFICATIONS

General: Lockers shall be Hallowell Bulk Storage Lockers with all welded components as manufactured by List Industries Inc., 2823 West Orange Avenue, Apopka, FL 32703, www.Hallowell-List.com. Quantities, sizes and arrangements shall be as shown on drawings.

Locker Fronts: All doors, whether single or double tier, shall consist of 1/2" 16 gauge flattened expanded metal framed by 1-3/8" x 1" 12 gauge formed angles. Single tier doors shall have an angle reinforcement across center. Doors shall be pre-hung in frames at the factory, with all hinges, padlock hasps and door strikes securely welded in position. Door frames shall be fabricated from 1-1/2" x 1" 14 gauge formed channels on the sides and 1-1/2" x 1" formed angles at top and bottom and include a 13" transom. All frames shall be pre-punched for ease of installation. All front assemblies are 1-1/2" deep.

Vertical Dividers: Shall be 1/2" 16 gauge flattened expanded metal securely welded to 1-1/8" x 1-1/8" 14 gauge formed angles. Shelf support channels shall be fabricated of 14 gauge steel and be welded to vertical dividers (sides) on inside and outside of intermediate double tier dividers and on inside only of double tier row end dividers as well as on inside of all single tier dividers. All vertical dividers are 1-1/2" less than nominal locker depth to allow for 1-1/2" deep door front assembly.

Repair Angles: 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

Shelves: Where required, shall be of 22 gauge galvanized sheet steel with double bends at front and back. Provided as standard for all double tier lockers to separate upper tier from lower tier. Provided in all multiple 12" (nominal) deep planks to meet locker depth. Galvanized shelves ship unpainted.

Backs: Optional, shall be of 1/2" 16 gauge flattened expanded metal frame-less design. Required at back-to-back conditions or where locker backs are away from walls.

Bottoms (optional): Where required, shall be of 22 gauge galvanized sheet steel with double bend at front and back. Galvanized bottoms ship unpainted.

Tops (optional): Shall be of 1/2" 16 gauge flattened expanded metal with a 16 gauge angle welded at rear. Provide mounting clips and bolts. Recommended where ceiling height is 12" or more above locker height.

Finish: All fronts, vertical dividers, backs and tops shall have one coat of Platinum powder coat finish. Bottoms and shelves shall be galvanized sheet steel, unpainted.

Installation: Vertical dividers and door frames shall be securely anchored to wall and/or floor with an anchoring system selected by the installer. All door frames, tops and backs shall be fastened together using 1/4" x 3/4" cadmium plated bolts and nuts, to be provided by installer.

***All steel storage lockers
are designed to provide maximum
security and durability.***

**Call Today For a Prompt
Professional Storage Assessment
866-566-0500**

**E-mail: info@hallowell-list.com
www.Hallowell-List.com**

2823 W. Orange Ave. P.O. Box 1267 Apopka, FL 32703

Proudly Made In America Since 1903

Hallowell[®]

BSL

**Bulk Storage
Lockers**



**Strong • Durable
Secure • Built to Last**

Quality is more than a tradition, it's a way of doing business.



Hallowell® Bulk Storage Lockers are the ideal solution for condos and any facility that requires additional secure storage capability.

Hallowell® Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility. Cost effectiveness and ease of installation make Bulk Storage Lockers the perfect choice when additional storage is needed. Choose from in-stock or custom sizes to fit your needs.

The use of Hallowell® Bulk Storage Lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.

RIGIDITY • STRENGTH • SAFETY • SECURITY



Bulk Storage Lockers feature **SafeMesh84™**, the industry's strongest and safest expanded metal.

- ✓ 84% more steel than 3/4" mesh
- ✓ 84% more steel = more rigid unit
- ✓ 1/2" mesh keeps fingers out
- ✓ Reduces risk of loss, theft and content damage



WE USE
1/2" Mesh
16 Gauge Flattened
Expanded Metal



THEY USE
3/4" Mesh
16 Gauge Flattened
Expanded Metal

*Shown with optional
expanded metal top*

13" transom

*Heavy-duty 13 gauge
7-knuckle 3-1/2" butt hinges*


*Welded door brace for
added rigidity*

*Welded padlock hasp and
ergonomic welded-on door pull*

*1/2" 16 gauge flattened expanded
metal doors and sides*

*Heavy-gauge vertical frame
channels and*

Horizontal frame angles

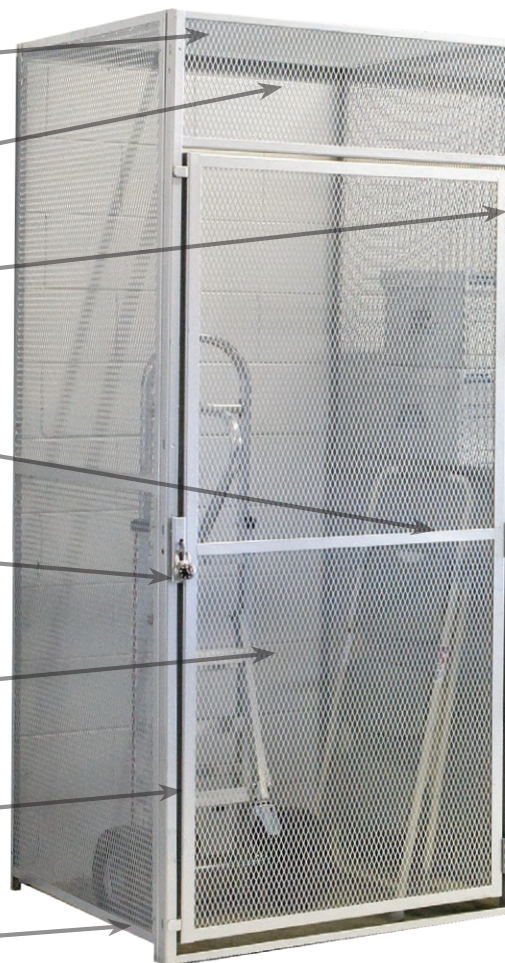

Single Tier Starter Unit

- Single & Double Tier Models
- Economical
- Secure
- Durable
- Fast & Easy Installation
- Low Life-Cycle Cost
- Attractive
- User Friendly



*Padlock hasp & Ergonomic one piece
door pull is welded to the door frame.*



*Heavy-Duty 7 knuckle hinges and
door stops are welded to the frame for
extra strength and security for a more
finished and attractive appearance.*



*Optional 16 gauge 1/2" expanded metal
top makes for security & rigidity for a
higher level of protection from theft*

**2 YEAR
WARRANTY**


**MADE IN
THE USA**




STOCK SIZES SHIP WITHIN 5 BUSINESS DAYS FROM RECEIPT OF ORDER

Easy Custom Installations


Hallowell® Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.

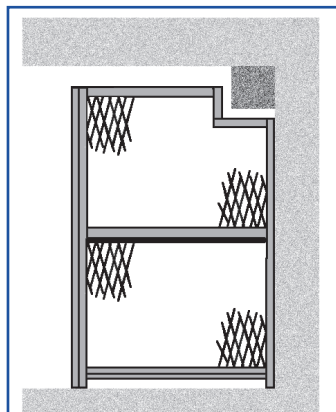

Showing cut out (with repair angles) to allow for interfering duct.



View of pipe through transom (or divider) with repair angle.



Repair Angles

Repair Angle 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

TOPS are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

SHELVES are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

BACKS are required for back-to-back installations or where a single row is set away from a wall.

BOTTOMS are recommended for use on all single or double tier lockers if dampness prevails.

Units available right-hand or left-hand hinged

- Single Tier: Overall Height 90"
Opening Height: 75-1/2"
- Double Tier: Overall Height 90"
Upper Opening Height: 31-1/2"
Lower Opening Height: 42"

Blue denotes in stock sizes. Custom sizes are also available.

STARTER UNITS						ADDER UNITS		
W	D	H	Part No. (Right Hinged)	Part No. (Left Hinged)	Wt (lbs.)	Part No. (Right Hinged)	Part No. (Left Hinged)	Wt (lbs.)
SINGLE TIER								
36	36	90	BSL363690-R-1S-PL	BSL363690-L-1S-PL	119	BSL363690-R-1A-PL	BSL363690-L-1A-PL	88
36	48	90	BSL364890-R-1S-PL	BSL364890-L-1S-PL	133	BSL364890-R-1A-PL	BSL364890-L-1A-PL	98
36	60	90	BSL366090-R-1S-PL	BSL366090-L-1S-PL	145	BSL366090-R-1A-PL	BSL366090-L-1A-PL	102
48	36	90	BSL483690-R-1S-PL	BSL483690-L-1S-PL	129	BSL483690-R-1A-PL	BSL483690-L-1A-PL	98
48	48	90	BSL484890-R-1S-PL	BSL484890-L-1S-PL	143	BSL484890-R-1A-PL	BSL484890-L-1A-PL	105
48	60	90	BSL486090-R-1S-PL	BSL486090-L-1S-PL	157	BSL486090-R-1A-PL	BSL486090-L-1A-PL	112
DOUBLE TIER								
36	36	45	BSL363690-R-2S-PL	BSL363690-L-2S-PL	127	BSL363690-R-2A-PL	BSL363690-L-2A-PL	105
36	48	45	BSL364890-R-2S-PL	BSL364890-L-2S-PL	155	BSL364890-R-2A-PL	BSL364890-L-2A-PL	116
36	60	45	BSL366090-R-2S-PL	BSL366090-L-2S-PL	178	BSL366090-R-2A-PL	BSL366090-L-2A-PL	127
48	36	45	BSL483690-R-2S-PL	BSL483690-L-2S-PL	137	BSL483690-R-2A-PL	BSL483690-L-2A-PL	115
48	48	45	BSL484890-R-2S-PL	BSL484890-L-2S-PL	165	BSL484890-R-2A-PL	BSL484890-L-2A-PL	126
48	60	45	BSL486090-R-2S-PL	BSL486090-L-2S-PL	188	BSL486090-R-2A-PL	BSL486090-L-2A-PL	137
ACCESSORIES FOR BULK STORAGE LOCKERS								
W	D	H	Part No.			Wt (lbs.)		
TOP PANELS								
36	36		4803636PL			9		
36	48		4803648PL			10		
36	60		4803660PL			11		
48	36		4804836PL			12		
48	48		4804848PL			13		
48	60		4804860PL			14		
FRONT EXTENSION PANELS								
6		90	4600690PL			20		
12		90	4601290PL			23		
18		90	4601890PL			26		
24		90	4602490PL			29		
BACK PANELS								
36		90	4703690PL			30		
48		90	4704890PL			38		
REPAIR ANGLES								
36			20100			3		

STORAGE LOCKER STOCK SIZES

Standard Sizes available in single & double tier configuration.

Width

3'-0", 4'-0"

Depths

3'-0", 4'-0", 5'-0"

Height

7'-6"



NEW

STOCK

COLOR

725

DARK GRAY (HG)



FOR MORE INFO GO TO
HALLOWELL-LIST.COM

NOTE: In the interest of safety, all lockers must be securely anchored to the floor and/or wall.

STOCK SIZES SHIP WITHIN 5 BUSINESS DAYS FROM RECEIPT OF ORDER



FOR MORE INFO GO TO
HALLOWELL-LIST.COM